




UK

dryrisers ltd

Dry Riser Inlet Cabinets

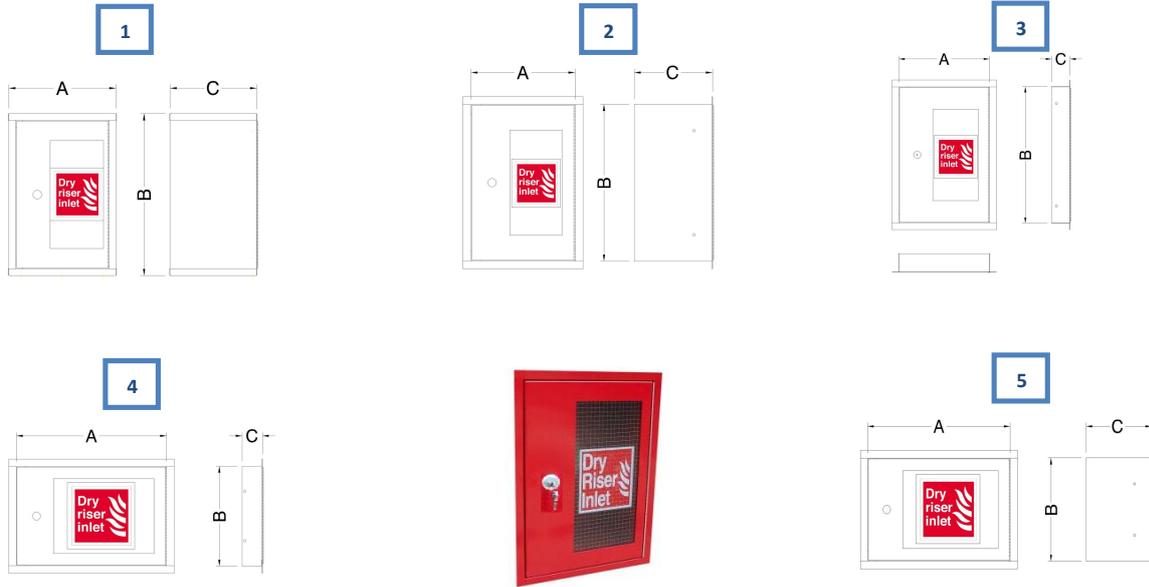

Description

Details

Inlet breaching valves are normally housed in inlet cabinets recessed into the external wall of a building. The 2-way inlet breaching valves are housed in either vertical or horizontal positions, 4-way inlet breaching valves are housed in square inlet breaching cabinets. All cabinets are manufactured in to comply with BS 5041: Part 5. Recommended mounting dimension . between 400mm & 600mm from FFL.

Material Specifications

Item	Material
Cabinet & Door	16 swg Zintec Steel
Colour	Red RAL 3002 or Stainless Steel Finish. <small>Other RAL colours available on request</small>
Architrave	30 mm wide all round
Glass	6 mm Georgian wired
Lock	Yale type slam lock (keyed alike)
Hinge	Stainless steel piano hinge
Conforms to	BS 5041 : Part 5

Cabinet Dimensions

Type	Wide mm	High mm	Depth mm	Diameter Hole (for Valve Entry) mm
1 - 2 Way Inlet Surface Mounted	395	595	295	230
2 - 2 Way Vertical Inlet	395	595	295	230
3 - 2 Way Inlet Door and Frame (Vertical)	395	595	80	230
4 - 2 Way Inlet Door and Frame (Horizontal)	595	395	80	230
5 - 2 Way Horizontal Inlet	595	395	295	230

Minimum Aperture Size

Type	Wide mm	High mm	Depth mm
1 - 2 Way Inlet Surface Mounted	n/a	n/a	n/a
2 - 2 Way Vertical Inlet	400	600	
3 - 2 Way Inlet Door and Frame (Vertical)	400	600	
4 - 2 Way Inlet Door and Frame (Horizontal)	600	400	
5 - 2 Way Horizontal Inlet	600	400	

- **Stainless Steel, Stone Inlay or Bespoke Cabinets also available**