




**UK**  
dryrisersLtd

# Dry Riser Outlet Cabinets

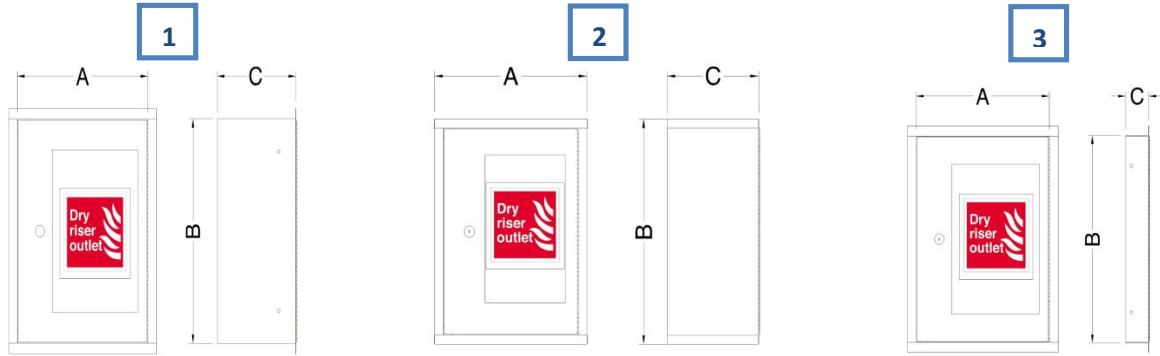

## Description

### Details

Landing valves are normally housed in outlet cabinets, which are either recessed or surface mounted onto the wall of a building.

### Material Specifications

Item	Material
Cabinet & Door	16 swg Zintec Steel
Colour	Red RAL 3002 or Stainless Steel Finish. <small>Other RAL colours available on request</small>
Architrave	30 mm wide all round
Glass	6 mm Georgian wired
Lock	Yale type slam lock
Hinge	Stainless steel piano hinge
Conforms to	BS 5041 : Part 4

## Cabinet Dimensions

Type	A mm	B mm	C mm	Diameter Hole (for Valve Entry) mm
1 - Recessed Outlet Cabinet	460	630	275	210
2 - Surface Mounted Outlet Cabinet	460	630	275	210
3 - Recessed Architrave & Door Outlet	460	630	100	-

## Minimum Aperture Size

Type	A mm	B mm	C mm
1 - Recessed Outlet Cabinet	470	640	-
2 - Surface Mounted Outlet Cabinet	n/a	n/a	-
3 - Recessed Architrave & Door Outlet	470	640	-

- **Stainless Steel or Bespoke Cabinets available**